

AUDIO / VIDEO


USB / USB - V2.0

ADAPTOR



USB / USB - V3.0

ADAPTOR

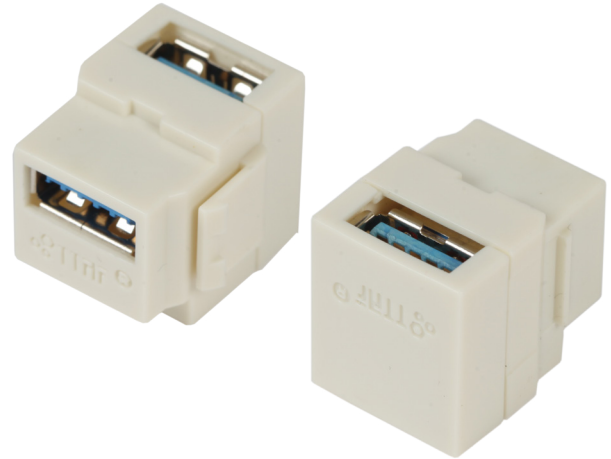

MATERIAL

Housing : White ABS High-Impact UL94V-0 Thermoplastic.
 Shell : Copper Alloy, Tin-Lead Plated Over Copper.
 Plastic : PBT High-Impact UL94V-0 Thermoplastic, Glass Filled 130°C.
 Contact : Copper Alloy 3U" Gold-Plated RoHS Compliant.

MATERIAL

Housing : White ABS High-Impact UL94V-0 Thermoplastic.
 Shell : Copper Alloy, Tin-Lead Plated Over Copper.
 Plastic : PBT High-Impact UL94V-0 Thermoplastic, Glass Filled 130°C.
 Contact : Copper Alloy 3U" Gold-Plated RoHS Compliant.

PHYSICAL CHARACTERISTICS

Durability : EIA 364-09,1500 Cycles.
 Temperature : -55°C+85°C.
 Humidity : 10%-90%RH.

PHYSICAL CHARACTERISTICS


Durability : EIA 364-09,1500 Cycles.
 Temperature : -55°C+85°C.
 Humidity : 10%-90%RH.

ELECTRICAL


Voltage : 30 VAC
 Current : 1.5 AMPS MIN,PER CONTACT AT 30°C T-RISE
 Insulation Resistance : 10 Mohm MINIMUM
 Dielectric With Standing Voltage : 300 V AC.
 Contact Resistance : 2 ohm MAX INITIAL.

ELECTRICAL

Voltage : 30 VAC
 Current : 1.5 AMPS MIN,PER CONTACT AT 30°C T-RISE
 Insulation Resistance : 10 Mohm MINIMUM
 Dielectric With Standing Voltage : 300 V AC.
 Contact Resistance : 2 ohm MAX INITIAL.

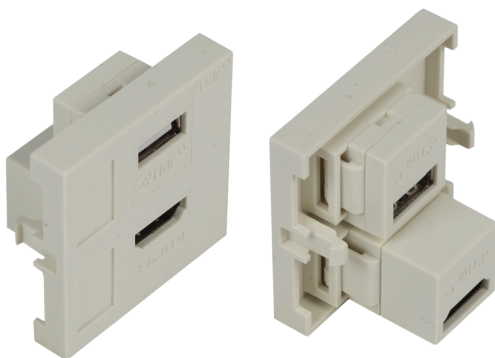

2 PORT HDMI&USB 2.0
FACE PLATE

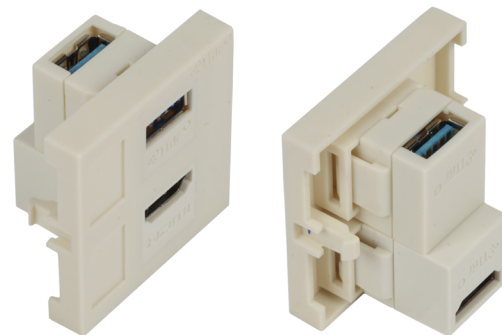

2 PORT HDMI&USB 3.0
FACE PLATE

Art No	Product Description	Art No	Product Description
FO-AD-USB2	22,5 X 45 USB 2.0 Adaptor	FO-AD-USB3	22,5 X 45 USB 3.0 Adaptor

