


CAT6 48 PORT UTP FAST ETHERNET PATCH PANELS (Keystone Type)

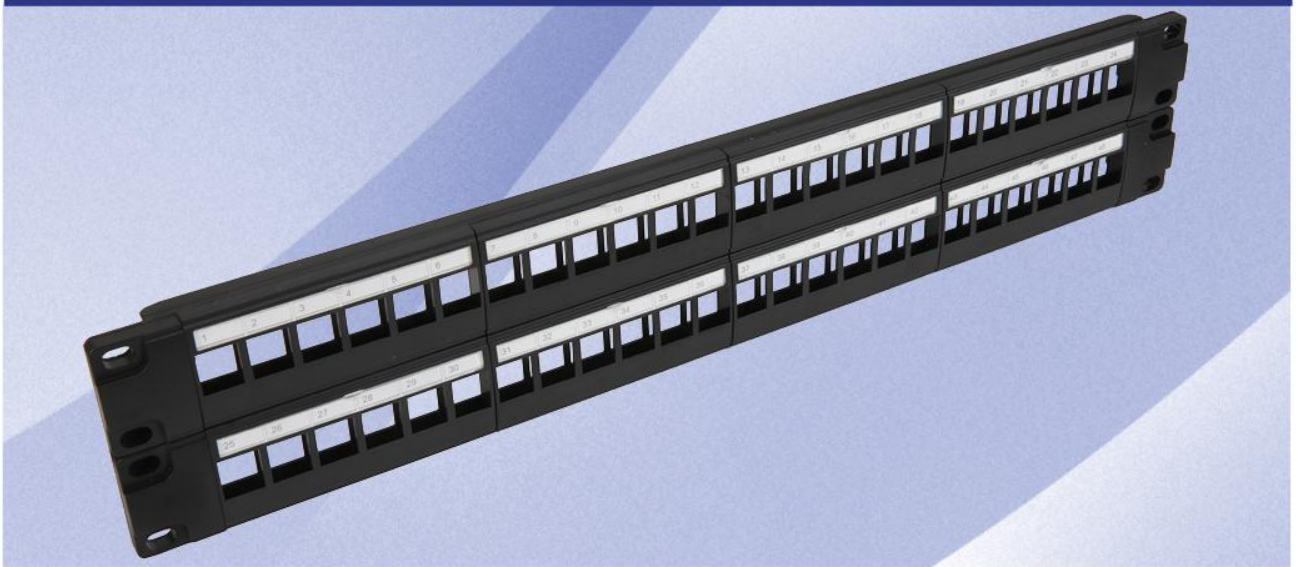

FEATURES

- » Hinged style window with white labels
- » Each 6/8-Port based module is replaceable
- » 2U HEIGHT: 88,90mm
- » 19 INCH WIDTH: 483mm
- » UTP (unshielded twisted pair keystone type)

STANDARDS & PHYSICAL SPECIFICATIONS


- » 250 MHz and above
- » ISO/IEC - 11801
- » UL 1863 safety listed
- » UL 94V-0 fire retardant plastic
- » ANSI/TIA/EIA-568-C.2
- » Dimensions: 482.6mm(W) x 87.40mm(H) x 35.0mm(D)

ELECTRICAL SPECIFICATIONS

- » Dielectric Strength: 1000 VRMS for 1min
- » Insulation Resistance: 10M Ω min
- » Contact Resistance: 20 m Ω max
- » Storage Temperature: -40 °C to +70 °C max
- » Operating Temperature: -20 °C to +60 °C max
- » Humidity: 10 %- 65%
- » Imbalance Input/Output Resistance : 200 m Ohm max.
- » Isolation Resistance : 500 Mega Ohm min. @500 Vdc
- » DC Resistance : 0.1 Ohm max @20 °C
- » EMC Standarts: EN-55022 Class B, FCC Part 15 Subpart J Class A

APPLICATION

- » 10BASE-TX Ethernet
- » 100BASE-TX Fast Ethernet
- » 1000BASE-TX Fast Ethernet
- » Voice, Video and other applications.

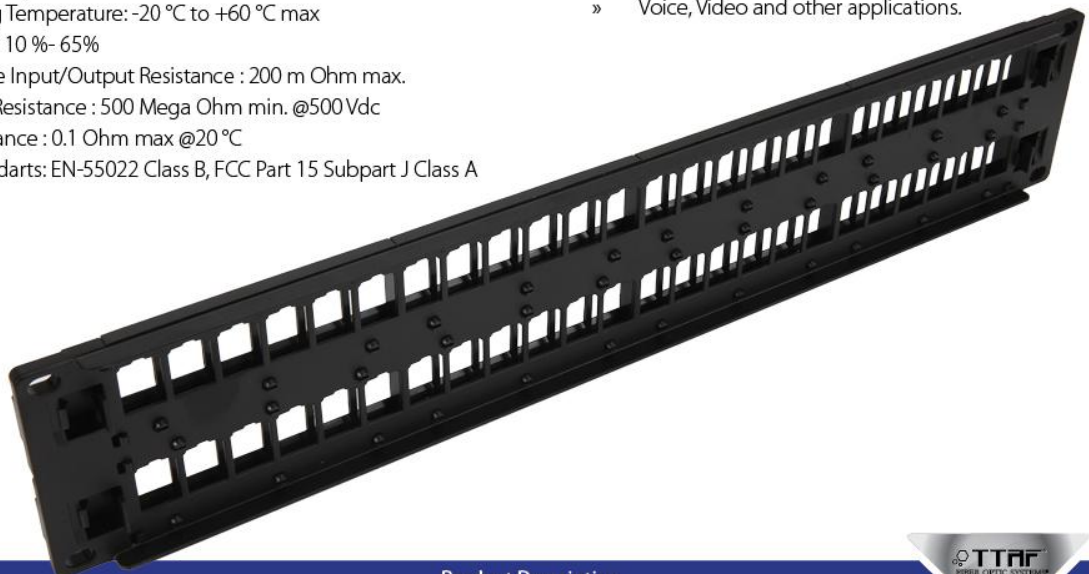

Art No

Product Description

FO-SP-3000-48PC6

2U 48 Port UTP Cat6 Patchpanel (Unloaded Keystone Type)

