



NETWORK COMMUNICATION SOLUTIONS

LAN CABLES

FTP Cat5e XL-LSZH

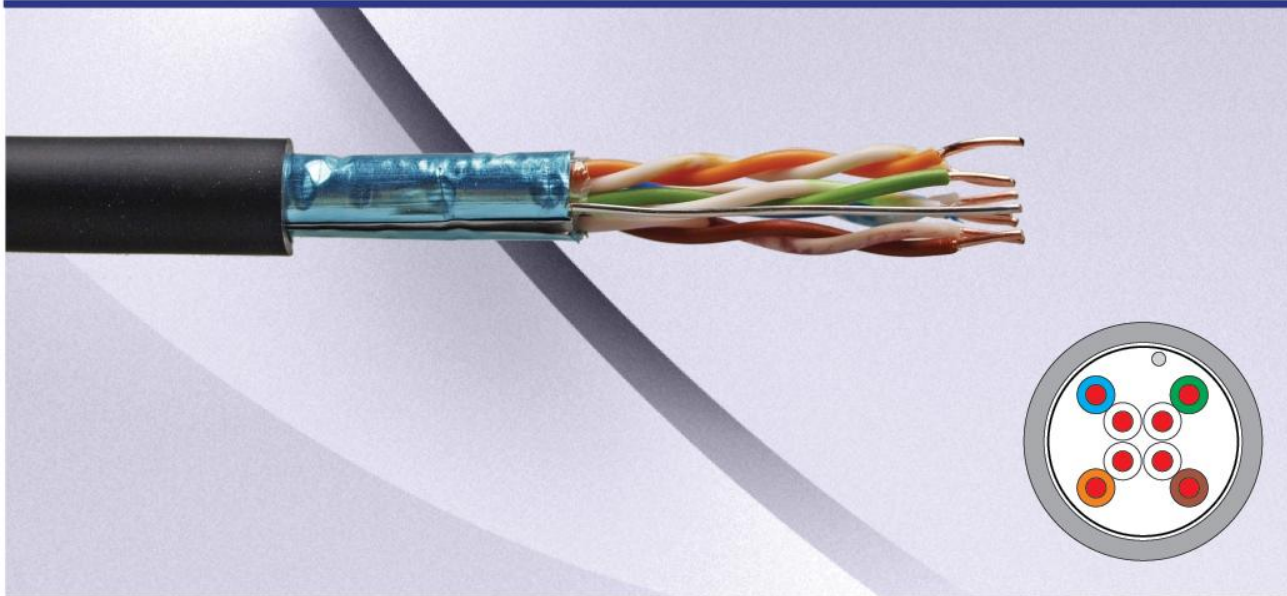

Transmission specifications

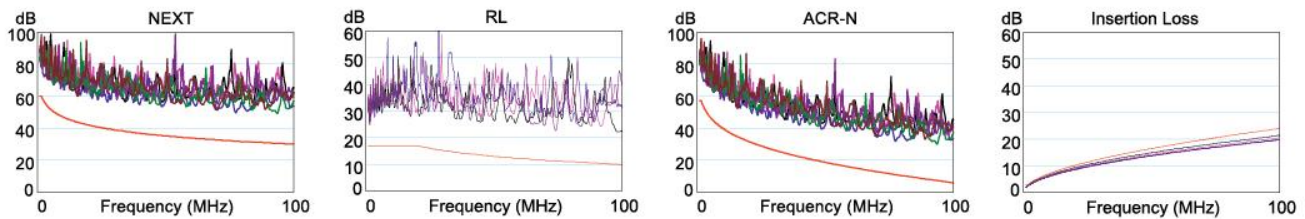

- » Temperature range(C °): -40 to 70
- » Velocity ratio(%): 69
- » Characteristic impedance: 100 ±15 Ohm
- » Bending radius (min.): 8 x cable diameter
- » Flame retardancy: IEC 60332-1
- » S-FTP Cat5e is also available.

Construction FTP Cat 5E

Conductor (dia.mm)	24 AWG SBC 0.50
Insulation (dia.mm)	HDPE - 0.95
Mylar spiral coverage	125%
Drain wire (dia.mm)	TC - 0.50
Screen	Al-PET - 125%
Jacket (dia.mm)	XL-LSZH - 6.50
No. of pairs	4

STANDARDS AND PERFORMANCES

- » EIA/TIA 568A
- » ISO/IEC 11801

Art No

FO-LC5e-FTPH

Product Description

FTP CAT5e XL-LSZH Cable

